

10W / 1110lm / 4000K / On/Off / Spot 12° /  
ø45mm

60300



Design: O/M

Recessed adjustable spotlight with aluminium body.

The spotlight can be rotated up to 90° horizontally and 330° vertically.

Easy recessing system with spring clips.

Accessories available separately and easily applicable after installation.

LED CRI>80 / >50.000h, L80/B10  
2-step MacAdam / Power supply included.  
IP20 | 230Vac | 50/60Hz



4000K

Light Source

Luminaire

Power

10W

12,5W

Flux

1360lm

1110lm

Efficiency

136lm/W


89lm/W

LOR

82%

UGR

<13



Beam angle  
Spot 12°

Application



Weight  
0,6Kg

□ mm

194x26


Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

Optional

- 59016 Elliptical refractor  
Ø39x0,5mm
- 59017 Soft diffuser  
Ø39x0,5mm
- 59018 Louvre  
Ø39x3mm
- 59019 Snoot 72mm  
Ø45x72

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

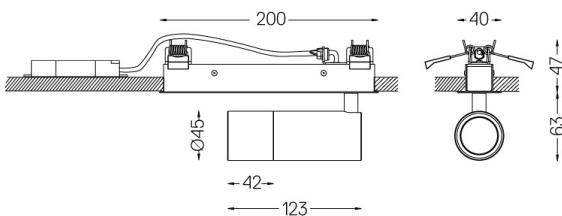

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU

supplemented by 2021/340/EU Energy Consumption Labelling

Ordinance. This product contains a light source of efficiency class F

Model Identifier 2053560247H