

10W / 990lm / 4000K / On/Off / Medium 28°  
/ ø45mm

60301




Design: O/M  
Recessed adjustable spotlight with aluminium body.  
The spotlight can be rotated up to 90° horizontally and 330° vertically.  
Easy recessing system with spring clips.  
Accessories available separately and easily applicable after installation.

LED CRI>80 / >50.000h, L80/B10  
2-step MacAdam / Power supply included.  
IP20 | 230Vac | 50/60Hz



|            |         |              |           |
|------------|---------|--------------|-----------|
|            | 4000K   | Light Source | Luminaire |
| Power      | 10W     | 12,5W        |           |
| Flux       | 1360lm  | 990lm        |           |
| Efficiency | 136lm/W | 79lm/W       |           |
| LOR        | -       | 73%          |           |
| UGR        | -       | <16          |           |



Beam angle  
Medium 28°




Weight  
0,6Kg

mm

194x26

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

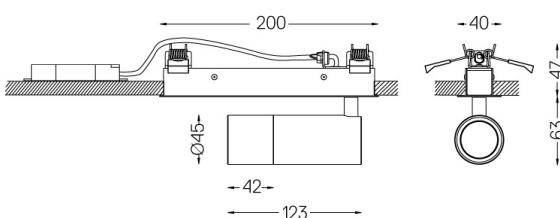

Optional

- 59016 Elliptical refractor  
Ø39x0,5mm
- 59017 Soft diffuser  
Ø39x0,5mm
- 59018 Louvre  
Ø39x3mm
- 59019 Snoot 72mm  
Ø45x72

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains a light source of efficiency class F  
Model Identifier 2053560247H