O/M



Onit

Recessed

10W / 1110Im / 4000K / DALI / Spot 12° / ø45mm

60302

Design: O/M

Recessed adjustable spotlight with aluminium body. The spotlight can be rotated up to 90° horizontally

and 330° vertically.


Easy recessing system with spring clips.


Accessories available separately and easily applicable after installation.

LED CRI>80 / >50.000h, L80/B10 2-step MacAdam / Power supply included. IP20 | 230Vac | 50/60Hz



1000K	Light Source	Luminaire
Power	10W	12,5W
Flux	1360lm	1110lm
Efficiency	136lm/W	89lm/W
LOR	-	82%
UGR	-	<13

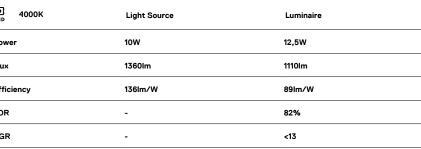




Beam angle Spot 12°

Application



Weight 0,6Kg

<u></u>



Finishes

O .01 White / RAL 9010

● .02 Black / RAL 9005

Optional

59016 Elliptical refractor

Ø39x0.5mm 59017 Soft diffuser

Ø39x0,5mm **59018** Louvre

Ø39x3mm

59019 Snoot 72mm

Ø45×72

For the specific supply of "DALI 2" drivers, please contact: support@om-light.com

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 |2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains a light source of efficiency class $\ensuremath{\mathsf{F}}$ Model Identifier 2053560247H