

10W / 780lm / 2700K / On/Off / Spot 12° / Ø45mm

60304



Design: O/M

Surface adjustable spotlight with aluminium body.

The spotlight can be rotated up to 90° horizontally and 330° vertically.

Accessories available separately and easily applicable after installation.

LED CRI>90 / >50.000h, L80/B10
2-step MacAdam / Power supply included.
IP20 | 230Vac | 50/60Hz



2700K

Light Source

Luminaire


Power 10W 12,5W

Flux 955lm 780lm

Efficiency 96lm/W 62lm/W

LOR - 0.82

UGR - <13



Beam angle
Spot 12°

Application



Weight
0,7Kg


mm

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

Optional

- 59016 Elliptical refractor Ø39x0,5mm
- 59017 Soft diffuser Ø39x0,5mm
- 59018 Louvre Ø39x3mm
- 59019 Snoot 72mm Ø45x72

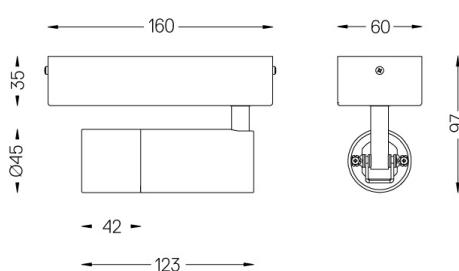

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU
supplemented by 2021/340/EU Energy Consumption Labelling
Ordinance. This product contains a light source of efficiency class F
Model Identifier 2053560245H