

10W / 810lm / 3000K / On/Off / Medium 28°  
/ ø45mm

60309



Design: O/M

Surface adjustable spotlight with aluminium body.


The spotlight can be rotated up to 90° horizontally and 330° vertically.

Accessories available separately and easily applicable after installation.

LED CRI>90 / >50.000h, L80/B10  
2-step MacAdam / Power supply included.  
IP20 | 230Vac | 50/60Hz



LED	3000K	Light Source	Luminaire
Power	10W	1035lm	12,5W
Flux	1035lm	119lm/W	810lm
Efficiency	119lm/W	-	73lm/W
LOR	-	-	0.78
UGR	-	-	<16




Beam angle  
Medium 28°

Application



Weight  
0,7Kg

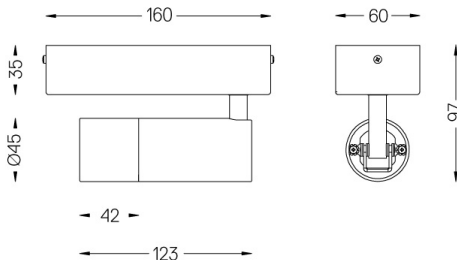

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

Optional

- 59016** Elliptical refractor  
Ø39x0,5mm
- 59017** Soft diffuser  
Ø39x0,5mm
- 59018** Louvre  
Ø39x3mm
- 59019** Snoot 72mm  
Ø45x72

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains a light source of efficiency class F  
Model Identifier 2053560257H