

Beam IP54

10W / 750lm / 3000K / On/Off / Flood 37° /
ø75mm

60410



Design: O/M


Ceiling-recessed luminaire made of aluminium die-cast.

Recessing accessory for flush version supplied separately.

LED CRI>90 / >50.000h, L80/B10
2-step MacAdam / power supply included
IP54 | 230Vac | 50/60Hz



LED	3000K	Light Source	Luminaire
Power	10W	104lm/W	12,5W
Flux	1035lm	60lm/W	750lm
Efficiency	104lm/W	-	72%
LOR	-	-	<22
UGR	-	-	<22

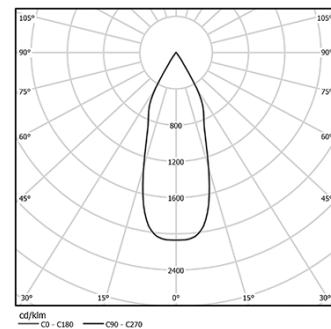

Beam angle
Flood 37°


Application



Weight
0,38Kg



Ø70 (trim version)

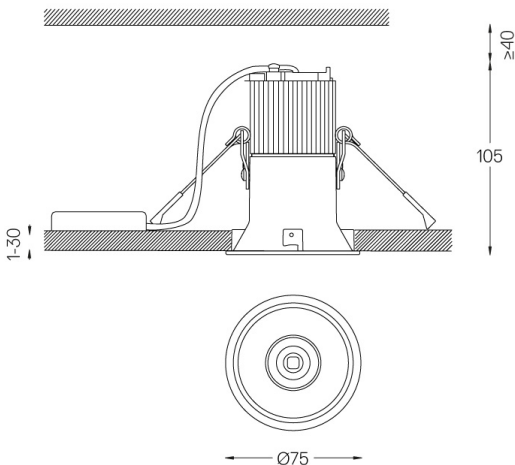

Finishes

- .04 Matt White
- .05 Matt Black

Optional

- 59063 Flush accessory (12.5mm ceilings)
176x17mm
- 59064 Flush accessory (15mm ceilings)
176x19,5mm
- 59065 Flush accessory (25mm ceilings)
176x29,5mm

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU
supplemented by 2021/340/EU Energy Consumption Labelling
Ordinance. This product contains a light source of efficiency class F
Model Identifier 2053560257H

Beam IP54

Flush accessory (12.5mm
ceilings)

59063

mm


Ø88



Flush accessory Beam $\varnothing 75$
For 12.5mm ceilings.

Weight
0,05Kg

Finishes
.99

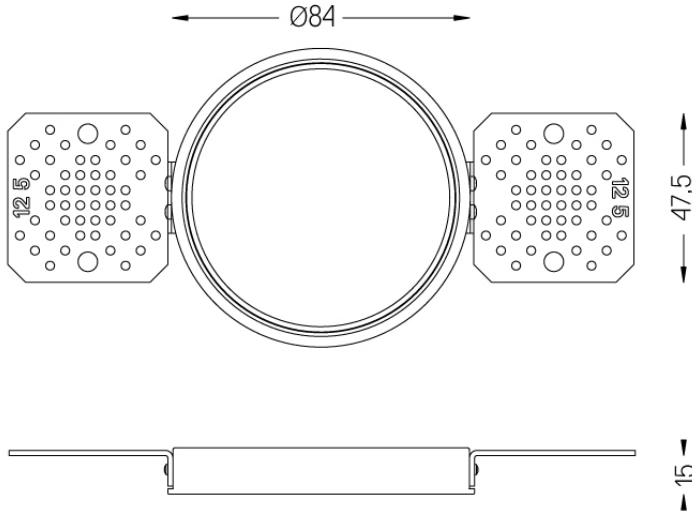

Beam IP54

Flush accessory (15mm
ceilings)

59064

1 mm


Ø88



Flush accessory Beam $\varnothing 75$
For 15mm ceilings.

Weight
0,05Kg

Finishes
.99

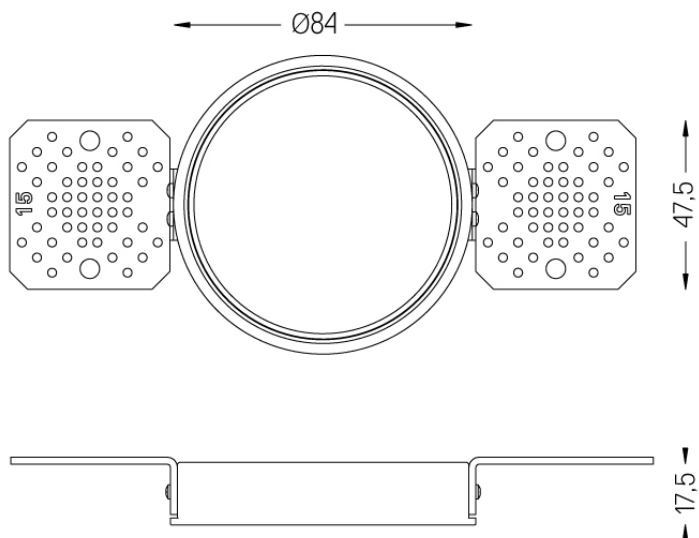

Beam IP54

Flush accessory (25mm
ceilings)

59065

mm

Ø88



Flush accessory Beam $\varnothing 75$
For 25mm ceilings.

Weight
0,05Kg

Finishes
.99

