


27W / 2750lm / 3000K / DALI / Wide flood  
76° / 1489mm

60511

Product timing available by request

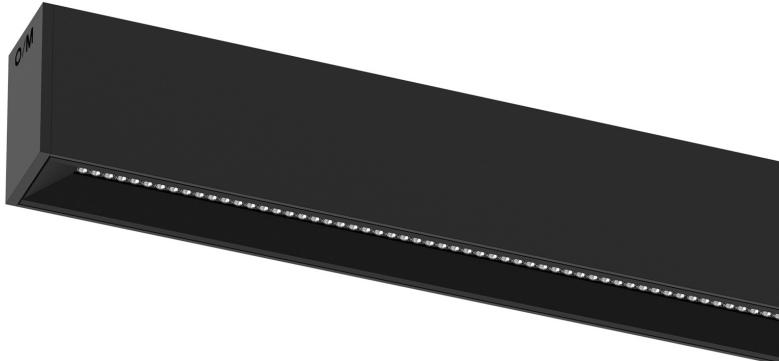


Design: OM + Bartenbach GmbH  
 Surface or pendant luminaire with housing made of aluminium with 25 micron maximum corrosion resistance anodization in matte finish or electrostatic 100% polyester paint with textured finish. Aluminium anodised end caps with matt finish or electrostatic 100% polyester paint with textured finish. Linear lenses (Lightstream) combined with a secondary reflector, integrated into an extruded aluminium profile. Fitting accessories ordered separately.

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam  
 Power supply included.  
 IP20 | 230Vac | 50/60Hz



LED	3000K	Light Source	Luminaire
Power	27W	32,3W	
Flux	3450lm	2750lm	
Efficiency	130lm/W	85lm/W	
LOR	-	80%	
UGR	-	<19	



Beam angle Wide flood 76°
Application
Weight 2,4Kg

mm

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

Mandatory

54036 Pendant direct fitting accessory  
 56051 Clear Base DALI  
 ø60x35mm

For the specific supply of "DALI 2" drivers, please contact:  
 support@om-light.com

