


26W / 2720lm / 3000K / DALI / Flood 64° /  
2353mm

60512

Product timing available by request

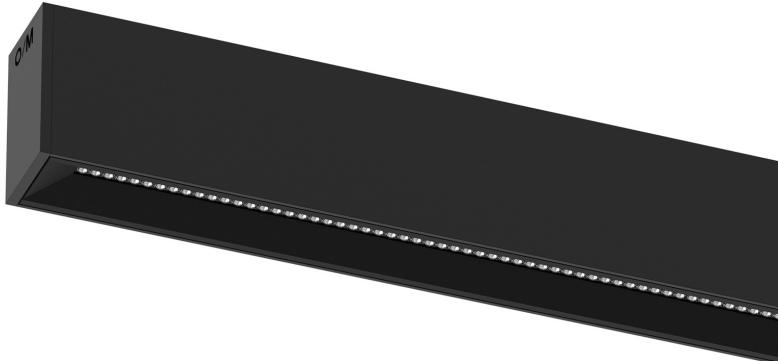


Design: OM + Bartenbach GmbH  
Surface or pendant luminaire with housing made of aluminium with 25 micron maximum corrosion resistance anodization in matte finish or electrostatic 100% polyester paint with textured finish. Aluminium anodised end caps with matt finish or electrostatic 100% polyester paint with textured finish. Linear lenses (Lightstream) combined with a secondary reflector, integrated into an extruded aluminium profile. Fitting accessories ordered separately.

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz



	<b>3000K</b>	<b>Light Source</b>	<b>Luminaire</b>
<b>Power</b>	<b>26W</b>	<b>31,7W</b>	
<b>Flux</b>	<b>3360lm</b>	<b>2720lm</b>	
<b>Efficiency</b>	<b>129lm/W</b>	<b>86lm/W</b>	
<b>LOR</b>	-	<b>81%</b>	
<b>UGR</b>	-	<b>&lt;13</b>	



Beam angle  
Flood 64°



Weight  
3,8Kg

mm

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

Mandatory

54036 Pendant direct fitting accessory

56051 Clear Base DALI

ø60x35mm

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com

