


22W / 2400lm / 4000K / DALI / Wide flood  
76° / 1201mm

60520

Product timing available by request

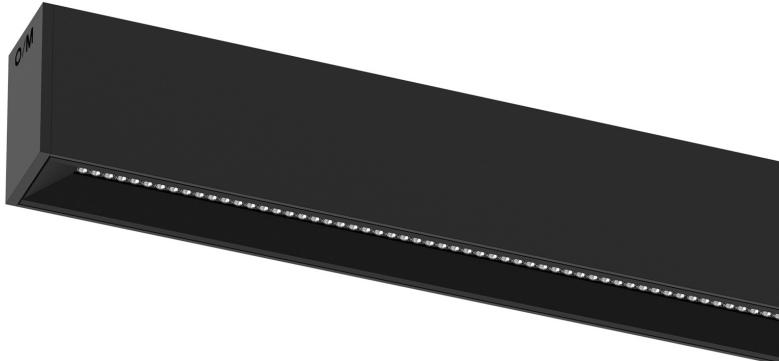


Design: OM + Bartenbach GmbH  
Surface or pendant luminaire with housing made of aluminium with 25 micron maximum corrosion resistance anodization in matte finish or electrostatic 100% polyester paint with textured finish. Aluminium anodised end caps with matt finish or electrostatic 100% polyester paint with textured finish. Linear lenses (Lightstream) combined with a secondary reflector, integrated into an extruded aluminium profile. Fitting accessories ordered separately.


LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz



	<b>4000K</b>	<b>Light Source</b>	<b>Luminaire</b>
<b>Power</b>	<b>22W</b>	<b>25,9W</b>	
<b>Flux</b>	<b>3000lm</b>	<b>2400lm</b>	
<b>Efficiency</b>	<b>142lm/W</b>	<b>93lm/W</b>	
<b>LOR</b>	-	<b>80%</b>	
<b>UGR</b>	-	<b>&lt;19</b>	



**Beam angle**  
**Wide flood 76°**



**Weight**  
**1,9Kg**

mm

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

Mandatory

**54036** Pendant direct fitting accessory

**56051** Clear Base DALI

ø60x35mm

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com

