


17W / 1800lm / 4000K / DALI / Flood 64° /
1489mm

60521

Product timing available by request

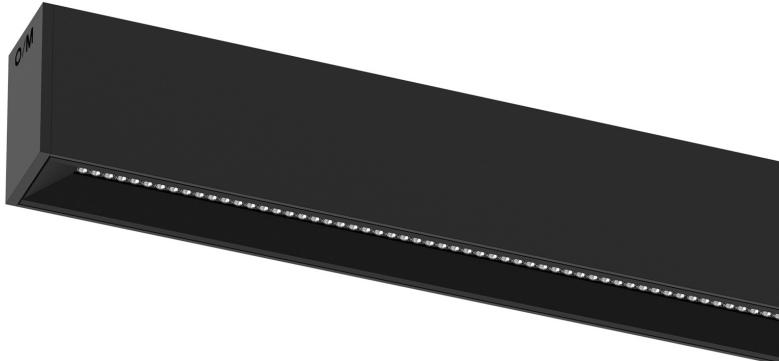


Design: OM + Bartenbach GmbH
 Surface or pendant luminaire with housing made of aluminium with 25 micron maximum corrosion resistance anodization in matte finish or electrostatic 100% polyester paint with textured finish. Aluminium anodised end caps with matt finish or electrostatic 100% polyester paint with textured finish. Linear lenses (Lightstream) combined with a secondary reflector, integrated into an extruded aluminium profile. Fitting accessories ordered separately.

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam
 Power supply included.
 IP20 | 230Vac | 50/60Hz



LED	4000K	Light Source	Luminaire
Power	17W	20,7W	
Flux	2250lm	1800lm	
Efficiency	132lm/W	87lm/W	
LOR	-	80%	
UGR	-	<13	



Beam angle
 Flood 64°



Weight
 2,4Kg

mm

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

Mandatory

54036 Pendant direct fitting accessory

56051 Clear Base DALI

ø60x35mm

For the specific supply of "DALI 2" drivers, please contact:
 support@om-light.com

