


27+56W / 2720+2560lm / 3000K / DALI /
Flood 64° / batwing / 2344mm

60534

Product timing available by request

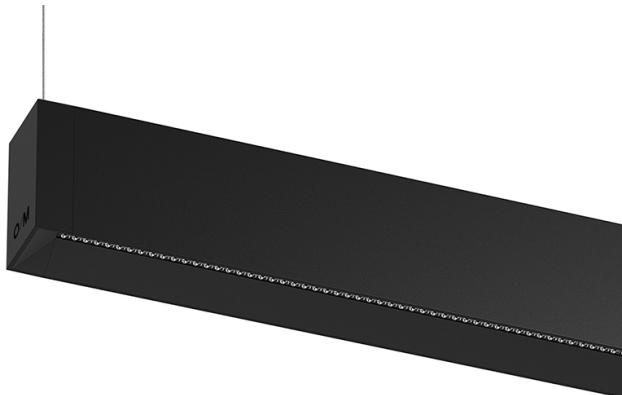

Design: OM + Bartenbach GmbH
Pendant direct and indirect luminaire with housing made of aluminium in matte finish.
Aluminium anodised end caps with matt finish.
Linear lenses (Lightstream) combined with a secondary reflector, integrated into an extruded aluminium profile.
Indirect light: Lenses for batwing effect protected by a transparent polycarbonate diffuser.
Fitting accessories ordered separately.

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam
Power supply included.
IP20 | 230Vac | 50/60Hz



3000K

Light Source

Luminaire


Power **27+56W** **32+64W**

Flux **3360+3200lm** **2720+2560lm**

Efficiency **79lm/W** **53lm/W**

LOR **-** **80%**

UGR **-** **<13**




Beam angle
Flood 64° / batwing

Application



Weight
8,2Kg

mm

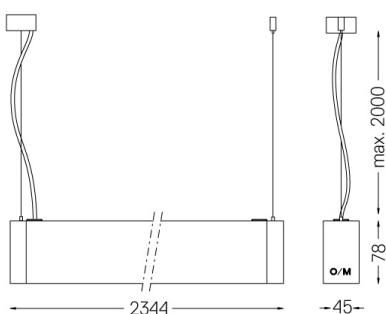

Finishes

- .04** Matt White
- .05** Matt Black

Mandatory

59054 Pendant direct/indirect fitting accessory
56051 Clear Base DALI
ø60x35mm

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.com