


27+56W / 2720+2560lm / 3000K / DALI /  
Wide flood 76° / batwing / 2344mm

60535

Product timing available by request

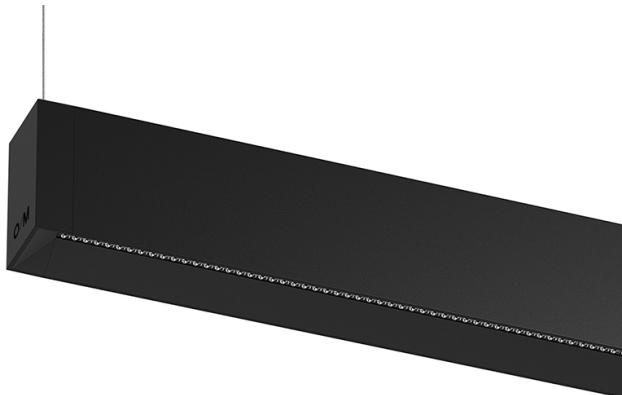


Design: OM + Bartenbach GmbH  
Pendant direct and indirect luminaire with housing made of aluminium in matte finish.  
Aluminium anodised end caps with matt finish.  
Linear lenses (Lightstream) combined with a secondary reflector, integrated into an extruded aluminium profile.  
Indirect light: Lenses for batwing effect protected by a transparent polycarbonate diffuser.  
Fitting accessories ordered separately.


LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz



LED	3000K	Light Source	Luminaire
Power	27+56W	32+64W	
Flux	3360+3200lm	2720+2560lm	
Efficiency	79lm/W	53lm/W	
LOR	-	80%	
UGR	-	<19	



Beam angle  
Wide flood 76° / batwing



Weight  
8,2Kg

Finishes

- .04 Matt White
- .05 Matt Black

Mandatory

59054 Pendant direct/indirect fitting accessory  
56051 Clear Base DALI  
ø60x35mm

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com

