


28W* / 3000lm* / 2200K-5000K / DALI /
Flood 64° / 1489mm

60556

Product timing available by request

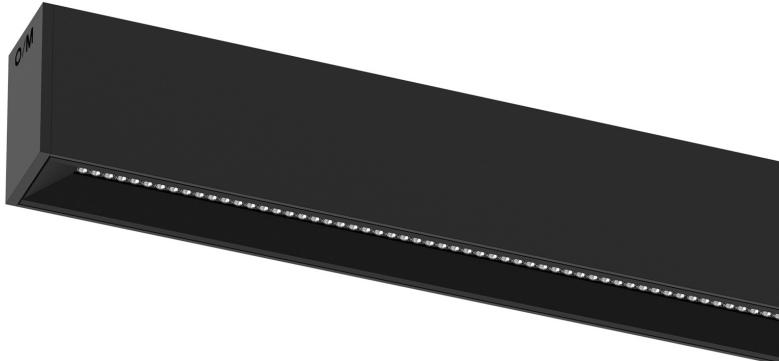


Design: OM + Bartenbach GmbH
Surface or pendant luminaire with housing made of aluminium with 25 micron maximum corrosion resistance anodization in matte finish or electrostatic 100% polyester paint with textured finish. Aluminium anodised end caps with matt finish or electrostatic 100% polyester paint with textured finish. Linear extruded lenses (Lightstream) combined with a secondary reflector, integrated into an extruded aluminium profile. Fitting accessories ordered separately.

LED CRI>80 / >50.000h, L80/B10 / 2-step MacAdam
Power supply included.
IP20 | 230Vac | 50/60Hz



2200K-5000K

	Light Source	Luminaire
Power	28W*	34,1W*
Flux	3750lm*	3000lm*
Efficiency	134lm/W	88lm/W
LOR	-	80%
UGR	-	<13



Beam angle
Flood 64°



Weight
2,4Kg

mm

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

Mandatory

54036 Pendant direct fitting accessory
56051 Clear Base DALI
ø60x35mm

