


U35 Recessed trimless

20W / 1825lm / 3000K / On/Off / Diffuse / 1422mm

Design: Eduardo Souto de Moura

60772

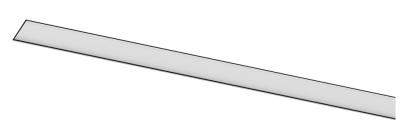

Recessed trimless luminaire with housing made of aluminium profile with 25micron maximum corrosion resistance anodization with matt finish or with

textured electrostatic 100% polyester paint. Frosted polycarbonate diffuser with user friendly

clipping system and double fitting system: flushed or recessed.

Aluminium anodised end caps with matt finish or electrostatic 100% polyester paint with texturedfinish.


Fitting accessories ordered separately.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam Power supply included. IP42 | 230Vac | 50/60Hz





3000K	Light Source	Luminaire
Power	20W	24,4W
Flux	3575lm	1825lm
Efficiency	179lm/W	75lm/W
LOR	-	51%
UGR	-	<25



Beam angle Diffuse Application Weight

1,7Kg

mm	√√√ 37×1424
----	-------------

	0		
	۲۱ ¥	6	ŧ
	≥30		+ 85
1422 —	Ť	- 35 -	

Finishes

O .01 White / RAL 9010 ● .02 Black / RAL 9005

.10 Anodised aluminium

59022 Recessed trimless fitting accessory

O/M recommends that any false ceilings intended for recessed products should be installed only after the products to be used have been chosen. The same applies when preparing openings for this type of product. O/M recommends reinforcing false ceilings close to any such openings, in accordance with the characteristics of the product to be recessed. The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 |2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains light sources of efficiency class C Model Identifier 89603211, 89603216