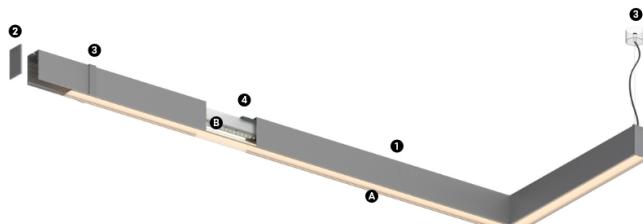


7,9W / 710lm / 2700K / DALI / Diffuse /
559mm

60864



Structure	Diffuser
1 Profile	A Polycarbonate frost
2 End caps	diffuser
3 Fitting accessories	
4 Profile coupling	B LED Modules

Design: O/M


LED light source with good colour consistency and
long operation lifespan.LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam
Power supply included.
IP20 | 230Vac | 50/60Hz

LED 2700K


Light Source

Luminaire

Power	7,9W	9,9W
Flux	1400lm	710lm
Efficiency	177lm/W	72lm/W
LOR	-	51%
UGR	-	<25

Beam angle
Diffuse

Application

Weight
0,5Kg

Finishes

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.comChoose the length and layout of the system exactly as you want it, to
model the right lighting functions for different tasks. For further
information please contact: support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU
supplemented by 2021/340/EU Energy Consumption Labelling
Ordinance. This product contains a light source of efficiency class D
Model Identifier 89603215