


24W / 2190lm / 3000K / DALI / Diffuse /
1679mm

60904

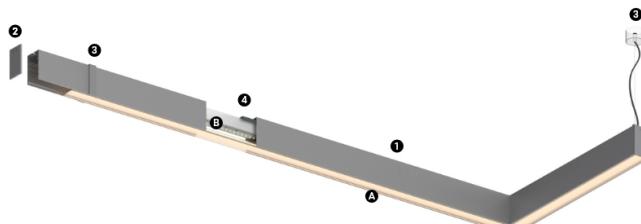

Structure

- 1 Profile
- 2 End caps
- 3 Fitting accessories
- 4 Profile coupling

Diffuser

- A Polycarbonate frost diffuser

Light Source

- B LED Modules

Design: O/M

LED light source with good colour consistency and long operation lifespan.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam
Power supply included.
IP20 | 230Vac | 50/60Hz

LED 3000K

Light Source	Luminaire
24W	29,3W


Power	24W	29,3W
--------------	-----	-------

Flux	4290lm	2190lm
-------------	--------	--------

Efficiency	179lm/W	75lm/W
-------------------	---------	--------

LOR	-	51%
------------	---	-----

UGR	-	<25
------------	---	-----



Application

Weight
0,6Kg

mm

Finishes

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.com

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU
supplemented by 2021/340/EU Energy Consumption Labelling
Ordinance. This product contains light sources of efficiency class C
Model Identifier 89603216

