
## O/M

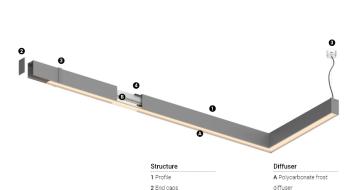

3 Fitting accessories

4 Profile coupling

## **U35** Made-to-measure

41W / 3960lm / 4000K / DALI / Diffuse / 1679mm

60933

Design: O/M

LED light source with good colour consistency and long operation lifespan.


LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam Power supply included. IP20 | 230Vac | 50/60Hz



Light Source

B LED Modules

4000K	Light Source	Luminaire
Power	41W	48,2W
Flux	7800lm	3960lm
Efficiency	190lm/W	82lm/W
LOR	-	51%
UGR	-	<28



Beam angle Diffuse

Application



Weight 0,6Kg





## Finishes

For the specific supply of "DALI 2" drivers, please contact: support@om-light.com

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 |2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains light sources of efficiency class C Model Identifier 89603217