

14W / 980lm / 3000K / DALI / Flood 52° / 600mm

60960



### Structure

- 1 Profile
- 2 End caps
- 3 Fitting accessories
- 4 Profile coupling

### Modules


- A inVision Module

Design: O/M + Bartenbach GmbH  
inVision module with housing and perforated cover plate made of aluminium with textured-paint finish.

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz



| LED        | 3000K  | Light Source | Luminaire |
|------------|--------|--------------|-----------|
| Power      | 14W    | 14W          | 17,1W     |
| Flux       | 1290lm | 1290lm       | 980lm     |
| Efficiency | 92lm/W | 92lm/W       | 57lm/W    |
| LOR        | -      | -            | 76%       |
| UGR        | -      | -            | <10       |




Beam angle  
Flood 52°

### Application



Weight  
0,5Kg

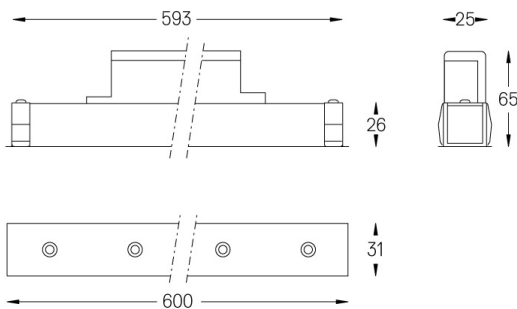

### Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com