

14W / 1260lm / 4000K / DALI / Medium 31° / 600mm

60974



### Structure

- 1 Profile
- 2 End caps
- 3 Fitting accessories
- 4 Profile coupling

### Modules

- A inVision Module


Design: O/M + Bartenbach GmbH

inVision module with housing and perforated cover plate made of aluminium with textured-paint finish.

LED CRI>80 / >50.000h, L80/B10 / 2-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz



| LED        | 4000K   | Light Source | Luminaire |
|------------|---------|--------------|-----------|
| Power      | 14W     | 17,1W        |           |
| Flux       | 1720lm  | 1260lm       |           |
| Efficiency | 123lm/W | 74lm/W       |           |
| LOR        | -       | 73%          |           |
| UGR        | -       | <10          |           |




Beam angle  
Medium 31°

### Application



Weight  
0,5Kg

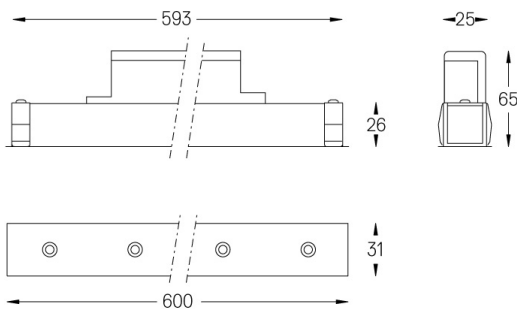

### Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com