


23W\* / 1420lm\* / 2200K-5000K / DALI /  
Flood 52° / 600mm

60983

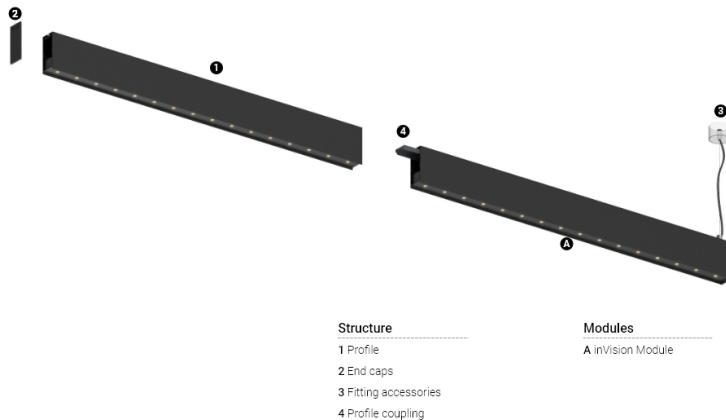

Design: O/M + Bartenbach GmbH  
inVision module with housing and perforated cover plate made of aluminium with textured-paint finish.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam  
Power supply included.  
DALI DT8.  
IP20 | 230Vac | 50/60Hz




**2200K-5000K**

**Light Source**

**Luminaire**

<b>Power</b>	<b>23W*</b>	<b>28W*</b>
<b>Flux</b>	<b>1880lm*</b>	<b>1420lm*</b>
<b>Efficiency</b>	<b>82lm/W</b>	<b>51lm/W</b>
<b>LOR</b>	-	<b>76%</b>
<b>UGR</b>	-	<b>&lt;16</b>



**Beam angle**  
**Flood 52°**

**Application**



**Weight**  
**0,6Kg**

mm

**Finishes**

- .01 White / RAL 9010
- .02 Black / RAL 9005

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com

