


46W / 2720lm / 2200K-5000K / DALI /
Medium 30° / 1200mm

60984

Design: O/M + Bartenbach GmbH
inVision module with housing and perforated cover
plate made of aluminium with textured-paint finish.

LED >80CRI<90 / >50.000h, L80/B10 / 3-step MacAdam
Power supply included.
DALI DT8.
IP20 | 230Vac | 50/60Hz

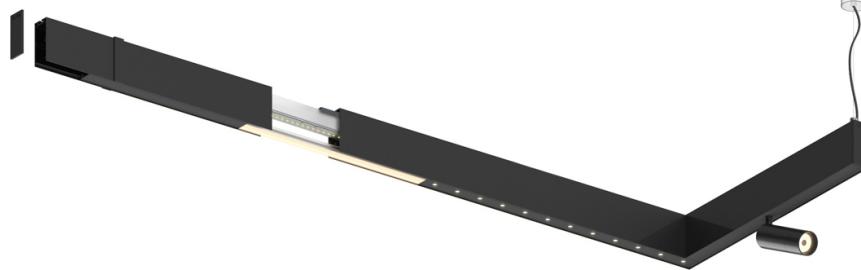

2200K-5000K

Light Source

Luminaire

Power

46W

58W

Flux

3760lm

2720lm

Efficiency

82lm/W

47lm/W

LOR


-

0.72

UGR

-

<10



Beam angle
Medium 30°

Application

Weight

mm

Finishes

- .01 White / RAL 9010**
- .02 Black / RAL 9005**

DALI DT8

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com

