

17W / 1700lm / 3000K / DALI / Flood 65° /  
1459mm


61159

Compatibility with other modules must be confirmed  
with support@om-light.com

Design: OM + Bartenbach  
GmbH

Module with linear extruded lenses (Lightstream)  
combined with a secondary reflector, integrated into  
an extruded aluminium profile.

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz

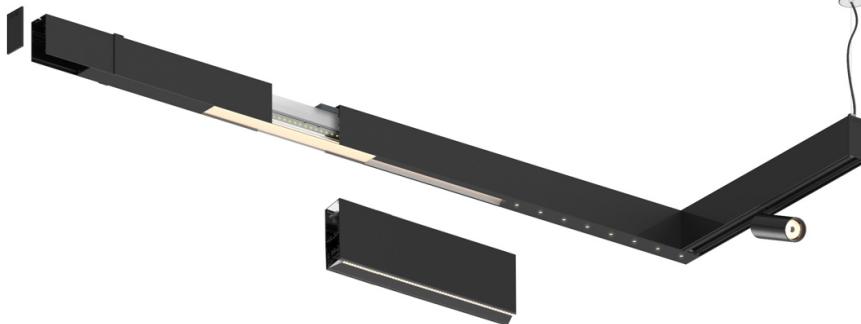

**3000K**

**Light Source**

**Luminaire**

**Power**

**17W**

**20W**

**Flux**

**2100lm**

**1700lm**

**Efficiency**

**127lm/W**

**87lm/W**

**LOR**


**-**

**0.8100000000000001**

**UGR**

**-**

**<13**



**Beam angle**  
**Flood 65°**

**Application**

**Weight**

**mm**

**Finishes**

- .01 White / RAL 9010**
- .02 Black / RAL 9005**

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com

Choose the length and layout of the system exactly as you want it, to  
model the right lighting functions for different tasks. For further  
information please contact: support@om-light.com

