

27W / 3000lm / 4000K / DALI / Wide flood
80° / 1459mm


61182

Compatibility with other modules must be confirmed
with support@om-light.com

Design: OM + Bartenbach
GmbH

Module with linear extruded lenses (Lightstream)
combined with a secondary reflector, integrated into
an extruded aluminium profile.

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam
Power supply included.
IP20 | 230Vac | 50/60Hz

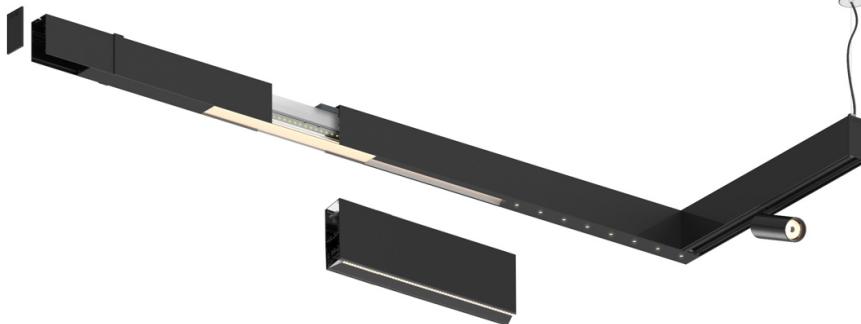

4000K

Light Source

Luminaire

Power

27W

31W

Flux

3750lm

3000lm

Efficiency

142lm/W

97lm/W

LOR

-


0.8

UGR

-

<19

Beam angle
Wide flood 80°



Application

Weight

mm

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.com

Choose the length and layout of the system exactly as you want it, to
model the right lighting functions for different tasks. For further
information please contact: support@om-light.com

