


16W / 740lm / 2700K / DALI / Wallwasher / 600mm

61245

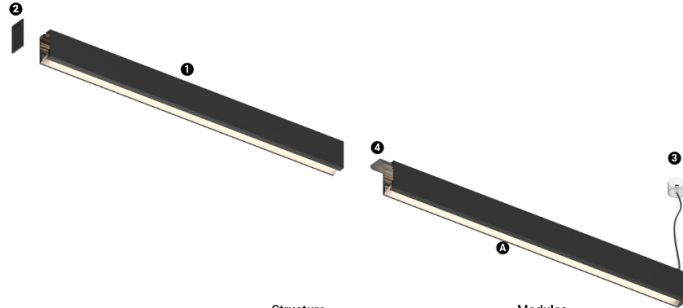

Structure
1 Profile
2 End caps
3 Fitting accessories
4 Profile coupling


Modules
A Uw modules

Design: O/M + Bartenbach GmbH
LED light source with excellent colour consistency and long operation lifespan.
Asymmetrical aluminium reflector.


LED CRI>90 / >50.000h, L80/B10
2-step MacAdam / power supply included.
IP20 | 230Vac | 50/60Hz



LED	2700K	Light Source	Luminaire
Power		16W	19W
Flux		1600lm	740lm
Efficiency		100lm/W	39lm/W
LOR		-	46%
UGR		-	-

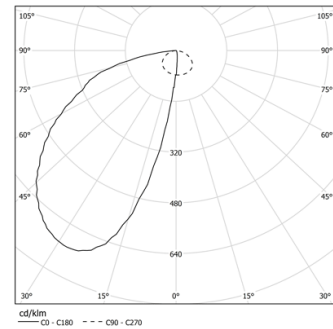

mm

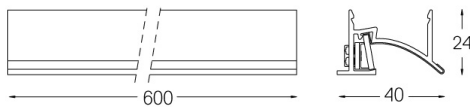

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005
- .10 Anodised aluminium

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.com

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com