


32W / 2050lm / 4000K / DALI / Asymmetric /
1200mm

61254

Compatibility with other modules must be confirmed
with support@om-light.com

Design: O/M + Bartenbach GmbH
LED light source with excellent colour consistency
and long operation lifespan.
Asymmetrical aluminium reflector.

LED CRI>80 / >50.000h, L80/B10
2-step MacAdam / power supply included.
IP20 | 230Vac | 50/60Hz

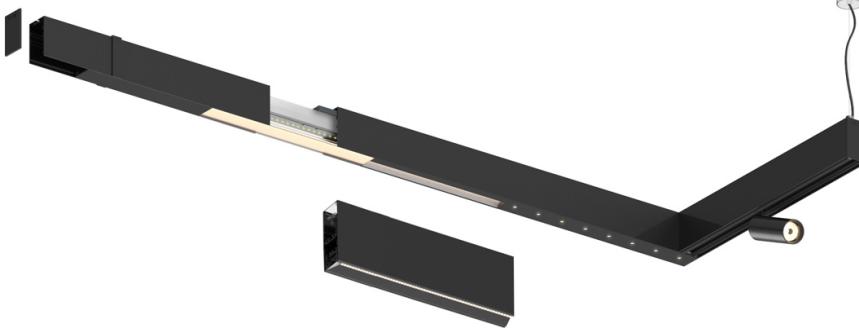

4000K

Light Source

Luminaire

Power

32W

38W

Flux

4480lm

2050lm

Efficiency

140lm/W

54lm/W

LOR

-

46%

UGR


-

-

Beam angle
Asymmetric

Application

Weight



mm

Finishes

- .01 White / RAL 9010**
- .02 Black / RAL 9005**
- .03 Grey / RAL 9006**

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.com

