


26W / 1880lm / 3000K / DALI / Medium 31° / 600mm

61282

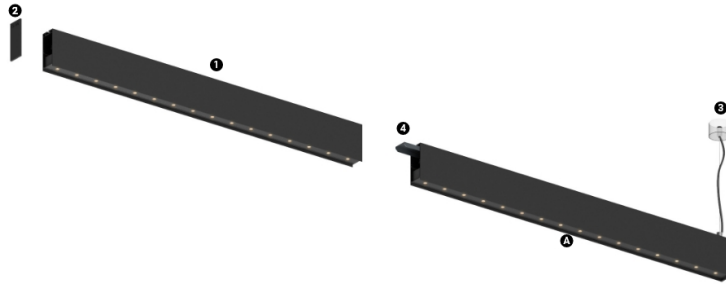

**Structure**

- 1 Profile
- 2 End caps
- 3 Fitting accessories
- 4 Profile coupling

**Modules**

- A inVision Module


Design: O/M + Bartenbach GmbH

inVision module with housing and perforated cover plate made of aluminium with textured-paint finish.


LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz



LED	3000K	Light Source	Luminaire
<b>Power</b>		26W	31,7W
<b>Flux</b>		2580lm	1880lm
<b>Efficiency</b>		99lm/W	59lm/W
<b>LOR</b>		-	73%
<b>UGR</b>		-	<13



mm

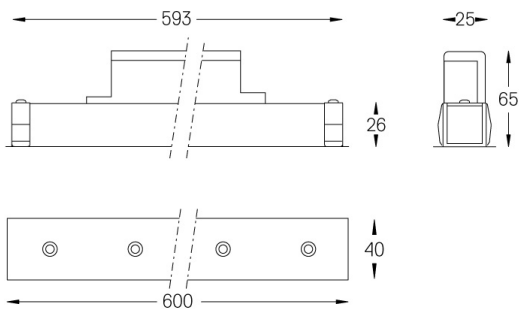

**Finishes**

- .01 White / RAL 9010
- .02 Black / RAL 9005

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com