

14W / 1300lm / 4000K / On/Off / Flood 52° /  
600mm

61291



#### Structure

- 1 Profile
- 2 End caps
- 3 Fitting accessories
- 4 Profile coupling

#### Modules

- A inVision Module

Design: O/M + Bartenbach GmbH

inVision module with housing and perforated cover plate made of aluminium with textured-paint finish.


LED CRI>80 / >50.000h, L80/B10 / 2-step MacAdam

Power supply included.

IP20 | 230Vac | 50/60Hz



LED	4000K	Light Source	Luminaire
Power	14W	14W	17,1W
Flux	1720lm	1720lm	1300lm
Efficiency	123lm/W	123lm/W	76lm/W
LOR	-	-	76%
UGR	-	-	<10

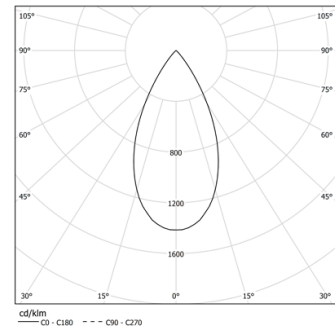


Beam angle  
Flood 52°

#### Application



Weight  
0,5Kg

mm

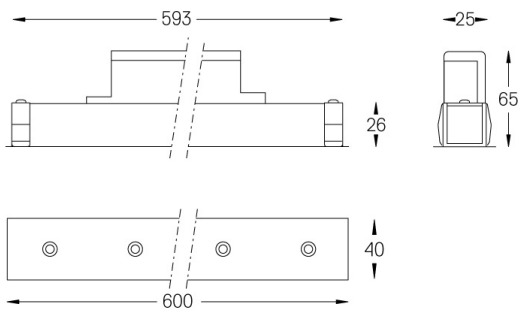

#### Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: [support@om-light.com](mailto:support@om-light.com)