


27W / 2600lm / 4000K / On/Off / Flood 52°
/ 1200mm

61295

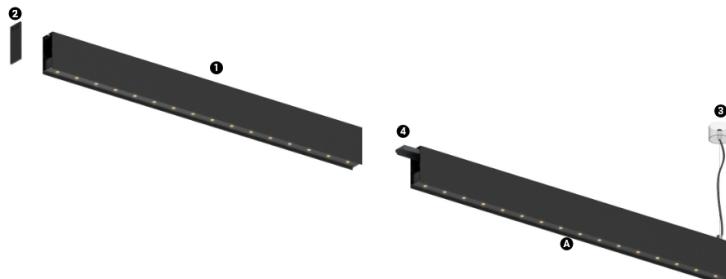

Structure

1 Profile
2 End caps
3 Fitting accessories
4 Profile coupling

Modules

A inVision Module

Design: O/M + Bartenbach GmbH
inVision module with housing and perforated cover plate made of aluminium with textured-paint finish.

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam
Power supply included.
IP20 | 230Vac | 50/60Hz




4000K

Light Source

Luminaire

Power	27W	32,9W
Flux	3440lm	2600lm
Efficiency	127lm/W	79lm/W
LOR	-	76%
UGR	-	<13



Beam angle
Flood 52°

Application



Weight
0,6Kg

mm

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com

