


23W* / 1360lm* / 2200K-5000K / On/Off /
Medium 31° / 600mm

61297

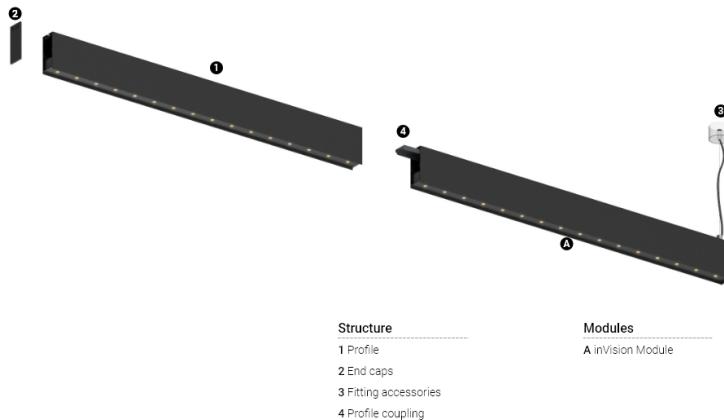


Design: O/M + Bartenbach GmbH
inVision module with housing and perforated cover plate made of aluminium with textured-paint finish.
2200-5000K Tunable White

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam
Power supply included.
DALI DT8.
IP20 | 230Vac | 50/60Hz



2200K-5000K

| | Light Source | Luminaire |
|------------|--------------|-----------|
| Power | 23W* | 28W* |
| Flux | 1880lm* | 1360lm* |
| Efficiency | 82lm/W | 49lm/W |
| LOR | - | 72% |
| UGR | - | <10 |




Beam angle
Medium 31°

Application



Weight
0,5Kg

mm

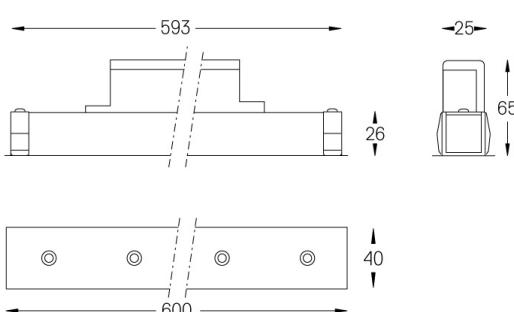

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com