


46W\* / 2720lm\* / 2200K-5000K / On/Off /  
Medium 31° / 1200mm

61299

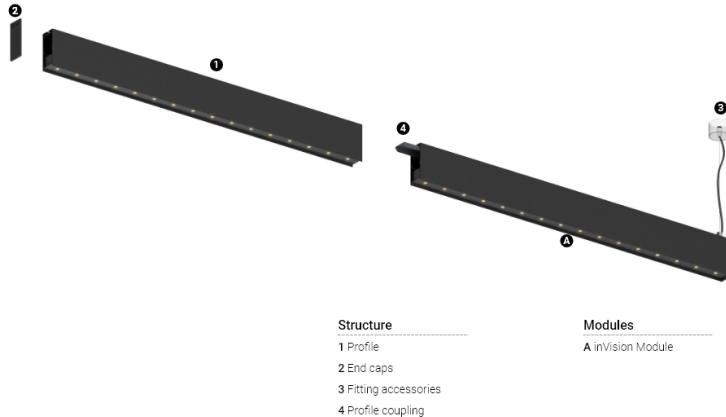


Design: O/M + Bartenbach GmbH  
inVision module with housing and perforated cover plate made of aluminium with textured-paint finish.  
2200-5000K Tunable White

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam  
Power supply included.  
DALI DT8.  
IP20 | 230Vac | 50/60Hz



2200K-5000K

	Light Source	Luminaire
Power	46W*	54,1W*
Flux	3760lm*	2720lm*
Efficiency	82lm/W	50lm/W
LOR	-	72%
UGR	-	<10



Application

Weight  
0,6Kg

mm

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com

