
## O/M

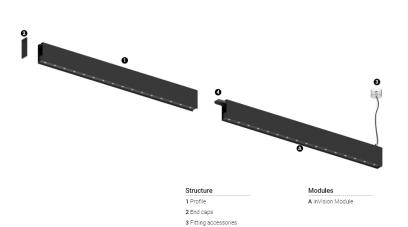

4 Profile coupling

## inVision45 Made-to-measure

46W\* / 2720lm\* / 2200K-5000K / On/Off / Medium 31° / 1200mm


61299

Design: O/M + Bartenbach GmbH inVision module with housing and perforated cover plate made of aluminium with textured-paint finish. 2200-5000K Tunable White


LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam Power supply included. DALI DT8. IP20 | 230Vac | 50/60Hz



<b>1</b> 2200K-5000K	Light Source	Luminaire
Power	46W*	54,1W*
Flux	3760lm*	2720lm*
Efficiency	82lm/W	50lm/W
LOR	-	72%
UGR	-	<10







## Finishes

.01 White / RAL 9010.02 Black / RAL 9005

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com