


46W* / 2840lm* / 2200K-5000K / On/Off /
Flood 52° / 1200mm

61300

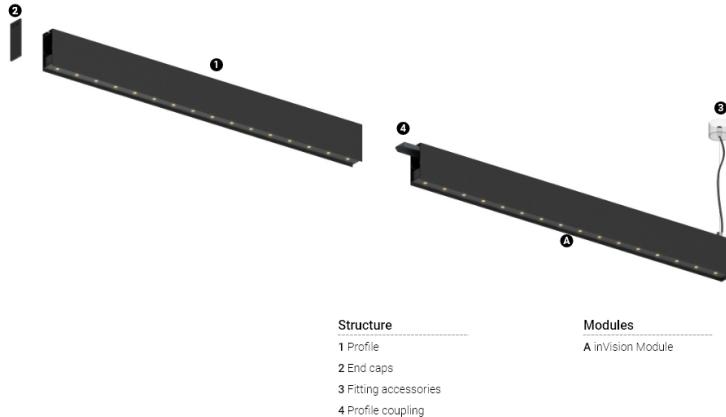


Design: O/M + Bartenbach GmbH
inVision module with housing and perforated cover plate made of aluminium with textured-paint finish.
2200-5000K Tunable White

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam
Power supply included.
DALI DT8.
IP20 | 230Vac | 50/60Hz



2200K-5000K

	Light Source	Luminaire
Power	46W*	54,1W*
Flux	3760lm*	2840lm*
Efficiency	82lm/W	52lm/W
LOR	-	76%
UGR	-	<16



Beam angle
Flood 52°

Application



Weight
0,6Kg

mm

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com

