


20W / 1630lm / 2700K / On/Off / Diffuse /
1399mm

61312

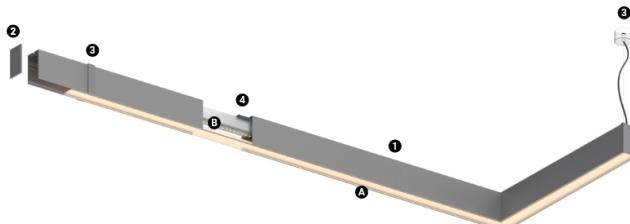

Structure	Diffuser
1 Profile	A Polycarbonate frost diffuser
2 End caps	
3 Fitting accessories	
4 Profile coupling	B LED Modules


Design: O/M
LED light source with good colour consistency and long operation lifespan.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam
Power supply included.
IP20 | 230Vac | 50/60Hz




LED 2700K

	Light Source	Luminaire
Power	20W	24,4W
Flux	3500lm	1630lm
Efficiency	175lm/W	67lm/W
LOR	-	47%
UGR	-	<25



Beam angle
Diffuse

Application



Weight
0,58Kg

mm

Finishes

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU
supplemented by 2021/340/EU Energy Consumption Labelling
Ordinance. This product contains light sources of efficiency class C
and D

Model Identifier 89603210, 89603215

