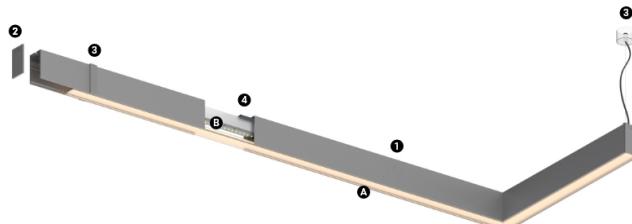


20W / 1630lm / 2700K / DALI / Diffuse /
1399mm

61328



Structure	Diffuser
1 Profile	A Polycarbonate frost diffuser
2 End caps	
3 Fitting accessories	
4 Profile coupling	B LED Modules

Design: O/M


LED light source with good colour consistency and long operation lifespan.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam
Power supply included.
IP20 | 230Vac | 50/60Hz


LED 2700K

Light Source Luminaire

Power	20W	24,4W
Flux	3500lm	1630lm
Efficiency	175lm/W	67lm/W
LOR	-	47%
UGR	-	<25

Beam angle
Diffuse

Application

Weight
0,58Kg

mm

Finishes

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.com

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU
supplemented by 2021/340/EU Energy Consumption Labelling
Ordinance. This product contains light sources of efficiency class C
and D

Model Identifier 89603210, 89603215

