

8,9W / 753,75lm / 3000K / On/Off / Diffuse
/ 629mm

61336

Design: O/M


LED light source with good colour consistency and long operation lifespan.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam
Power supply included.
IP20 | 230Vac | 50/60Hz



- | | |
|-----------------------|--------------------------------|
| Structure | Diffuser |
| 1 Profile | A Polycarbonate frost diffuser |
| 2 End caps | |
| 3 Fitting accessories | Light Source |
| 4 Profile coupling | B LED Modules |

LED	3000K	Light Source	Luminaire
Power		8,9W	11,1W
Flux		1608,75lm	753,75lm
Efficiency		181lm/W	68lm/W
LOR		-	47%
UGR		-	<25




Beam angle
Diffuse

Application

Weight
0,5Kg

mm

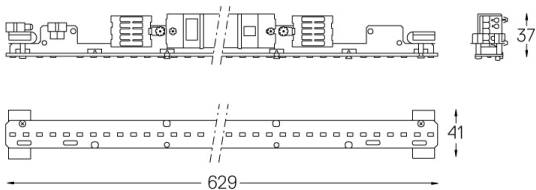

Finishes

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains light sources of efficiency class C
Model Identifier 89603203, 89603216