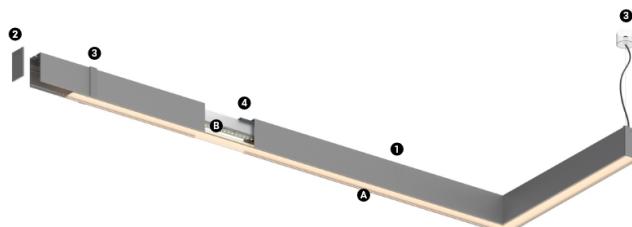


20W / 1725lm / 3000K / DALI / Diffuse /  
839mm

61357



Structure	Diffuser
1 Profile	A Polycarbonate frost
2 End caps	diffuser
3 Fitting accessories	
4 Profile coupling	B LED Modules

Design: O/M

LED light source with good colour consistency and long operation lifespan.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz

LED 3000K

Light Source Luminaire


Power 20W 24,4W

Flux 3675lm 1725lm


Efficiency 184lm/W 71lm/W

LOR - 47%

UGR - &lt;25

Beam angle  
Diffuse

Application

Weight  
0,51Kg

mm

Finishes

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains light sources of efficiency class C  
Model Identifier 89603211, 89603216