


16W / 1340lm / 3000K / DALI / Diffuse /
1119mm

61358

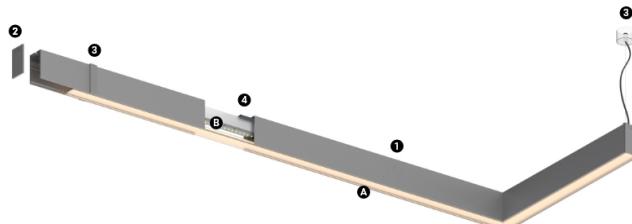

| Structure | Diffuser |
|-----------------------|--------------------------------|
| 1 Profile | A Polycarbonate frost diffuser |
| 2 End caps | |
| 3 Fitting accessories | |
| 4 Profile coupling | B LED Modules |

Design: O/M


LED light source with good colour consistency and long operation lifespan.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam
Power supply included.
IP20 | 230Vac | 50/60Hz


LED 3000K

Light Source Luminaire

| | | |
|------------|---------|--------|
| Power | 16W | 19,5W |
| Flux | 2860lm | 1340lm |
| Efficiency | 179lm/W | 69lm/W |
| LOR | - | 47% |
| UGR | - | <25 |



Application

Weight
0,57Kg

Finishes

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.com

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU
supplemented by 2021/340/EU Energy Consumption Labelling
Ordinance. This product contains light sources of efficiency class C
Model Identifier 89603216