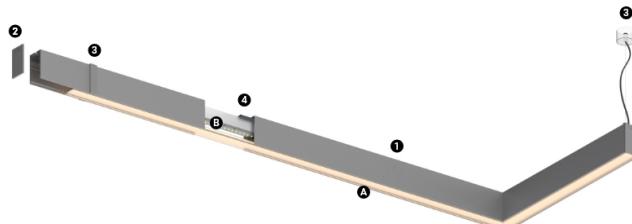


41W / 3450lm / 3000K / DALI + E-KIT /  
Diffuse / 1679mm

61365



Structure	Diffuser
1 Profile	A Polycarbonate frost
2 End caps	diffuser
3 Fitting accessories	
4 Profile coupling	B LED Modules


Design: O/M

LED light source with good colour consistency and  
long operation lifespan.LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz


LED 3000K

Light Source Luminaire

Power	41W	48,2W
Flux	7350lm	3450lm
Efficiency	179lm/W	72lm/W
LOR	-	47%
UGR	-	<25

Beam angle  
Diffuse

Application

Weight  
0,8Kg

mm

Finishes

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains light sources of efficiency class C  
Model Identifier 89603216