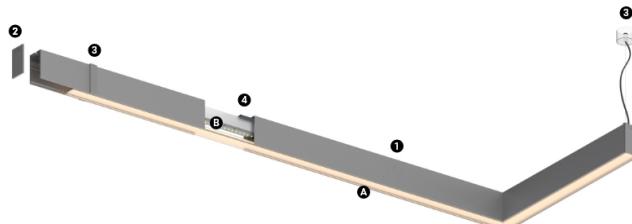


8,9W / 800lm / 4000K / On/Off / Diffuse /  
629mm

61368




Structure	Diffuser
1 Profile	A Polycarbonate frost
2 End caps	diffuser
3 Fitting accessories	
4 Profile coupling	B LED Modules

Design: O/M


LED light source with good colour consistency and  
long operation lifespan.LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz

LED 4000K

	Light Source	Luminaire
Power	8,9W	11,1W
Flux	1700lm	800lm
Efficiency	191lm/W	72lm/W
LOR	-	47%
UGR	-	<25

Beam angle  
Diffuse

Application

Weight  
0,5Kg

mm

Finishes

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains light sources of efficiency class C  
Model Identifier 89603204, 89603217