

## U60 Surface/Pendant

14W / 1600lm / 4000K / DALI / Prismatic /  
1149mm

61888



Design: Eduardo Souto de Moura  
Surface or pendant luminaire with housing made of aluminium profile with 25micron maximum corrosion resistance anodization with matt finish or with textured electrostatic 100% polyester paint. Prismatic polycarbonate diffuser with low luminance and glare control (UGR<19 for low output or UGR<22 for High Output). Aluminium anodised end caps with matt finish or electrostatic 100% polyester paint with textured-finish.  
Fitting accessories ordered separately.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam  
Power supply included.  
IP40 | 230Vac | 50/60Hz



LED	4000K	Light Source	Luminaire
Power	14W		17,1W
Flux	2600lm		1600lm
Efficiency	186lm/W		94lm/W
LOR	-		62%
UGR	-		<19




Beam angle  
Prismatic

Application



Weight  
2,5Kg



### Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005
- .10 Anodised aluminium

### Mandatory

54036 Pendant direct fitting accessory  
56051 Clear Base DALI  
ø60x35mm

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com


### Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains light sources of efficiency class C Model Identifier 89603217

## U60 Surface/Pendant

Pendant direct fitting  
accessory

54036


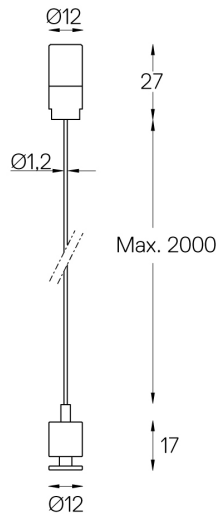


One 2m steel cable (1,2mm)  
Max interval 3m

## U60 Surface/Pendant

Clear Base DALI

56051



DALI (5x0,75mm<sup>2</sup>). Includes:  
One clear polycarbonate power supply base (IP20).  
One clear power cable (2m).  
One clear power supply base must be applied every 30m (ø60x35mm)  
Steel cable ordered separately