


24W / 2010lm / 2700K / On/Off + E-KIT /  
Diffuse / 1679mm

61910

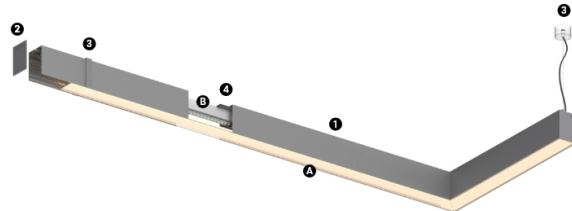

Structure	Diffuser
1 Profile	A Polycarbonate frost
2 End caps	diffuser
3 Fitting accessories	
4 Profile coupling	B LED Modules

Design: O/M  
LED light source with good colour consistency and long operation lifespan.


LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz



LED 2700K


Light Source Luminaire

Power	24W	29,3W
Flux	4200lm	2010lm
Efficiency	175lm/W	69lm/W
LOR	-	48%
UGR	-	<25



Beam angle  
Diffuse

Application



Weight  
0,8Kg

mm

Finishes

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains light sources of efficiency class D  
Model Identifier 89603215

