


24W / 2010lm / 2700K / DALI + E-KIT /  
Diffuse / 1679mm

61926

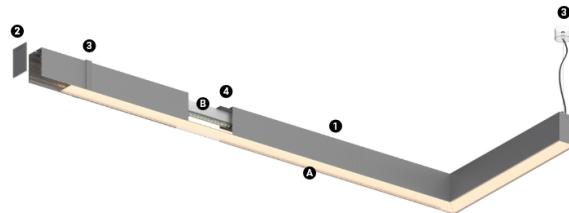

Structure	Diffuser
1 Profile	A Polycarbonate frost
2 End caps	diffuser
3 Fitting accessories	
4 Profile coupling	B LED Modules


Design: O/M  
LED light source with good colour consistency and long operation lifespan.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz




2700K

	Light Source	Luminaire
Power	24W	29,3W
Flux	4200lm	2010lm
Efficiency	175lm/W	69lm/W
LOR	-	48%
UGR	-	<25



Beam angle  
Diffuse

Application



Weight  
0,8Kg

mm

Finishes

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains light sources of efficiency class D  
Model Identifier 89603215

