


34W / 2925lm / 3000K / On/Off / Diffuse /  
1399mm

61939

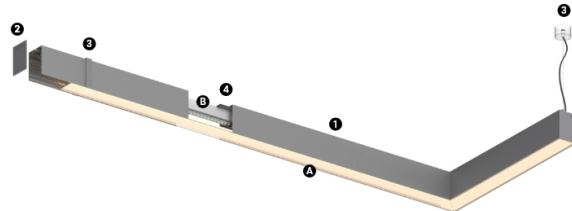

Structure	Diffuser
1 Profile	A Polycarbonate frost
2 End caps	diffuser
3 Fitting accessories	
4 Profile coupling	B LED Modules

Design: O/M

LED light source with good colour consistency and long operation lifespan.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz



3000K

**Light Source**

**Luminaire**

**Power**

**34W**

**40W**

**Flux**

**6125lm**

**2925lm**

**Efficiency**

**180lm/W**

**73lm/W**

**LOR**


-

**48%**

**UGR**


-

**<25**



**Beam angle**  
**Diffuse**

**Application**



**Weight**  
**0,58Kg**

**Finishes**

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com

**Data according to regulations**

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains light sources of efficiency class C  
Model Identifier 89603211, 89603216

