


8,9W / 775lm / 3000K / DALI / Diffuse /
629mm

61946

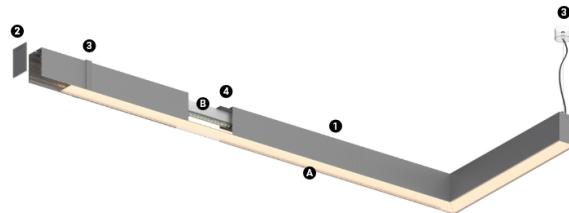

Structure
 1 Profile
 2 End caps
 3 Fitting accessories
 4 Profile coupling

Diffuser
 A Polycarbonate frost diffuser
Light Source
 B LED Modules

Design: O/M
 LED light source with good colour consistency and long operation lifespan.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam
 Power supply included.
 IP20 | 230Vac | 50/60Hz



LED 3000K

Light Source Luminaire


Power 8,9W 11,1W

Flux 1610lm 775lm

Efficiency 181lm/W 70lm/W

LOR - 48%

UGR - <25



Weight
0,5Kg

mm

Finishes

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.com

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU
 supplemented by 2021/340/EU Energy Consumption Labelling
 Ordinance. This product contains light sources of efficiency class C
 Model Identifier 89603203, 89603216

