


12W / 1035lm / 3000K / DALI / Diffuse /  
839mm

61950

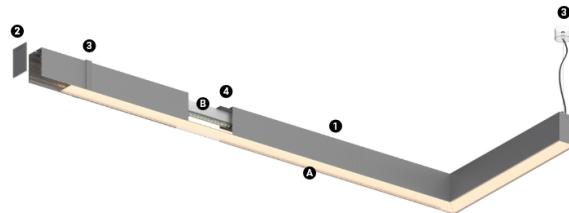

**Structure**  
1 Profile  
2 End caps  
3 Fitting accessories  
4 Profile coupling

**Diffuser**  
A Polycarbonate frost diffuser  
**Light Source**  
B LED Modules

Design: O/M  
LED light source with good colour consistency and long operation lifespan.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz




**LED** 3000K

**Light Source**


**Luminaire**

<b>Power</b>	<b>12W</b>	<b>14,6W</b>
<b>Flux</b>	<b>2145lm</b>	<b>1035lm</b>
<b>Efficiency</b>	<b>179lm/W</b>	<b>71lm/W</b>
<b>LOR</b>	<b>-</b>	<b>48%</b>
<b>UGR</b>	<b>-</b>	<b>&lt;25</b>



**Beam angle**  
**Diffuse**

**Application**



**Weight**  
**0,51Kg**

mm

**Finishes**

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com

**Data according to regulations**

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains light sources of efficiency class C  
Model Identifier 89603211, 89603216

