


34W / 2925lm / 3000K / DALI / Diffuse /  
1399mm

61955

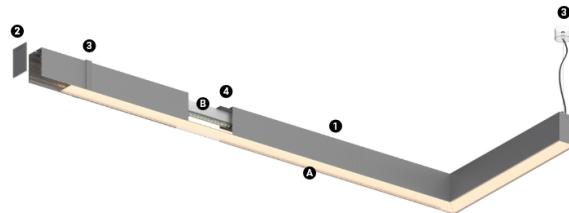

**Structure**  
1 Profile  
2 End caps  
3 Fitting accessories  
4 Profile coupling

**Diffuser**  
A Polycarbonate frost diffuser  
**Light Source**  
B LED Modules

Design: O/M  
LED light source with good colour consistency and long operation lifespan.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz



**3000K**

**Light Source**

**Luminaire**

**Power**

**34W**

**40W**

**Flux**

**6125lm**

**2925lm**

**Efficiency**

**180lm/W**

**73lm/W**

**LOR**


-

**48%**

**UGR**


-

**<25**



**Beam angle**  
**Diffuse**

**Application**



**Weight**  
**0,58Kg**

**mm**

**Finishes**

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com

**Data according to regulations**

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains light sources of efficiency class C  
Model Identifier 89603211, 89603216

