


9,9W / 910lm / 4000K / DALI / Diffuse /  
699mm

61980

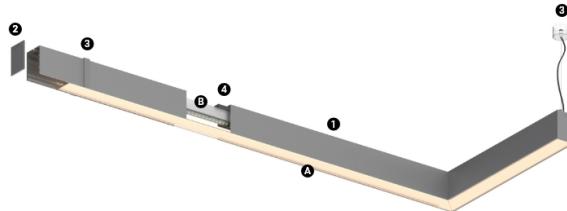

**Structure**  
 1 Profile  
 2 End caps  
 3 Fitting accessories  
 4 Profile coupling

**Diffuser**  
 A Polycarbonate frost diffuser  
**Light Source**  
 B LED Modules

Design: O/M  
 LED light source with good colour consistency and long operation lifespan.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam  
 Power supply included.  
 IP20 | 230Vac | 50/60Hz




**4000K**

**Light Source**


**Luminaire**

<b>Power</b>	<b>9,9W</b>	<b>12,4W</b>
<b>Flux</b>	<b>1890lm</b>	<b>910lm</b>
<b>Efficiency</b>	<b>191lm/W</b>	<b>74lm/W</b>
<b>LOR</b>	<b>-</b>	<b>48%</b>
<b>UGR</b>	<b>-</b>	<b>&lt;25</b>



**Beam angle**  
**Diffuse**

**Application**



**Weight**  
**0,5Kg**

**mm**

**Finishes**

For the specific supply of "DALI 2" drivers, please contact:  
[support@om-light.com](mailto:support@om-light.com)

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: [support@om-light.com](mailto:support@om-light.com)

**Data according to regulations**

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
 supplemented by 2021/340/EU Energy Consumption Labelling  
 Ordinance. This product contains light sources of efficiency class C  
 Model Identifier 89603207, 89603217

