

## U120

### Surface/Pendant

174W / 14500lm / 3000K / DALI / Diffuse /  
2891mm

62039



Design: Eduardo Souto de Moura

Surface or pendant luminaire with housing made of aluminium profile with 25micron maximum corrosion resistance anodization with matt finish or with textured electrostatic 100% polyester paint. Frosted polycarbonate diffuser with user friendly clipping system and double fitting system: flushed or recessed.

Aluminium anodised end caps with matt finish or electrostatic 100% polyester paint with textured-finish.

Fitting accessories ordered separately.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam  
Power supply included.  
IP40 | 230Vac | 50/60Hz



| LED        | 3000K | Light Source | Luminaire |
|------------|-------|--------------|-----------|
| Power      |       | 174W         | 201W      |
| Flux       |       | 23500lm      | 14500lm   |
| Efficiency |       | 134lm/W      | 72lm/W    |
| LOR        |       | -            | 62%       |
| UGR        |       | -            | <25       |




Beam angle  
Diffuse

Application



Weight  
12,9Kg

Image not found or type unknown

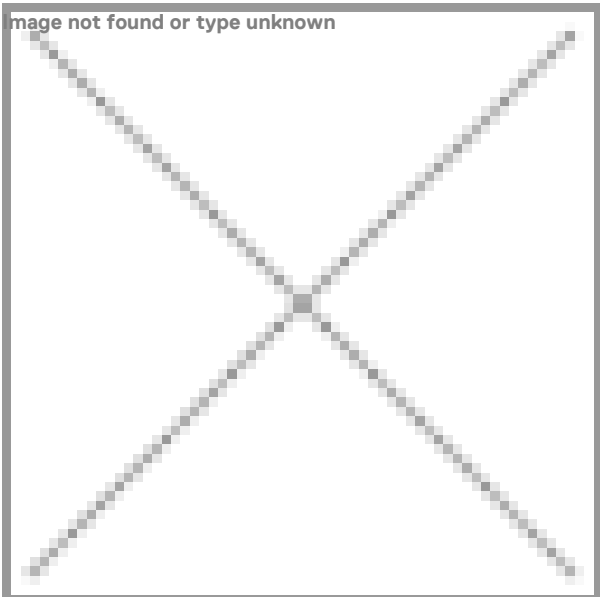

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005
- .10 Anodised aluminium

Mandatory

54036 Pendant direct fitting accessory

56051 Clear Base DALI

ø60x35mm

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains light sources of efficiency class D  
Model Identifier WU-M-526-S-BC-830, WU-M-536-S-BC-830