

95W / 8300lm / 4000K / DALI / Diffuse /  
2891mm

62054



Design: Eduardo Souto de Moura  
 Surface or pendant luminaire with housing made of aluminium profile with 25micron maximum corrosion resistance anodization with matt finish or with textured electrostatic 100% polyester paint.  
 Frosted polycarbonate diffuser with user friendly clipping system and double fitting system: flushed or recessed.  
 Aluminium anodised end caps with matt finish or electrostatic 100% polyester paint with textured-finish.  
 Fitting accessories ordered separately.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam  
 Power supply included.  
 IP40 | 230Vac | 50/60Hz



**4000K**

**Light Source** **Luminaire**


**Power** **95W** **109W**

**Flux** **13400lm** **8300lm**

**Efficiency** **141lm/W** **76lm/W**

**LOR** **-** **62%**

**UGR** **-** **<25**




**Beam angle**  
**Diffuse**

**Application**



**Weight**  
**12,9Kg**

**Image not found or type unknown**

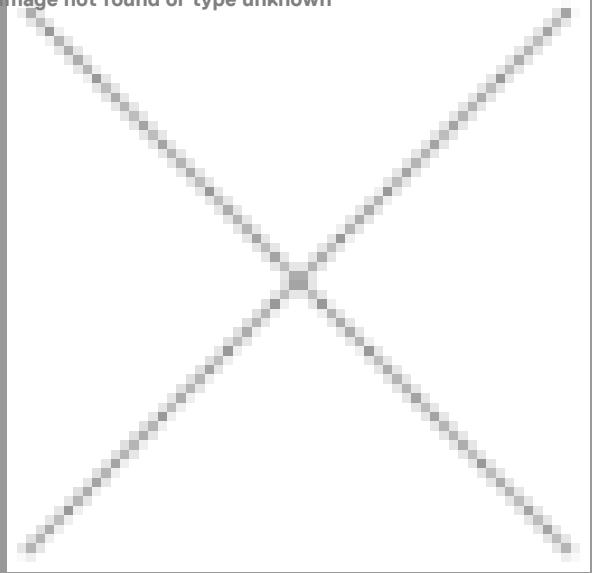

**Finishes**

- .01 White / RAL 9010**
- .02 Black / RAL 9005**
- .10 Anodised aluminium**

**Mandatory**

**54036** Pendant direct fitting accessory  
**56051** Clear Base DALI  
 ø60x35mm

For the specific supply of "DALI 2" drivers, please contact:  
[support@om-light.com](mailto:support@om-light.com)

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
 supplemented by 2021/340/EU Energy Consumption Labelling  
 Ordinance. This product contains light sources of efficiency class C  
 Model Identifier WU-M-526-S-BC-840, WU-M-536-S-BC-840