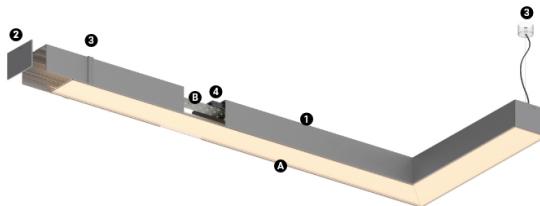


87W / 7250lm / 3000K / DALI / Diffuse /  
1429mm

62139



**Structure**  
1 Profile  
2 End caps  
3 Fitting accessories  
4 Profile coupling


**Diffuser**  
A Polycarbonate frost diffuser  
**Light Source**  
B LED Modules

Design: O/M  
LED light source with good colour consistency and long operation lifespan.


LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz



LED 3000K

**Light Source****Luminaire****Power****87W****101W****Flux****11750lm****7250lm****Efficiency****134lm/W****72lm/W****LOR****62%****UGR****<25**

**Beam angle**  
**Diffuse**

**Application**

**Weight**  
**0,58Kg**

mm

**Finishes**

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com

**Data according to regulations**

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains light sources of efficiency class D  
Model Identifier WU-M-526-S-BC-830, WU-M-536-S-BC-830

